

HML carbon monoxide transmitters are designed for detecting carbon monoxide in underground parking garages and parking halls. The measuring cell is an environmentally friendly electro-chemical cell with good long term stability and high accuracy. A calibration report is delivered with the transmitter.

As the sensor is heated, the transmitter works also in temperatures down to -30 °C.

Please note the warm-up time at the commissioning; output is 0 V or 4 mA and the display of HML-N is blinking.

The transmitter calibration interval is one year. However, the HMV exchange kit is the recommended method to ensure the correct transmitter function. A new calibration report is delivered with the exchange kit.

NOTE: We expect returning of the replaced parts for further use. This helps to keep the HMV exchange kit price low.

If necessary, the transmitter can be calibrated by using HML-C tool and 150 ppm reference gas.

IMPORTANT: The reference gas must contain oxygen (O₂).

Selecting the measuring range

	0...100 ppm	0...300 ppm *
S1	● ●	■


* = factory setting

Selecting the output signal

	0...10 Vdc *	4...20 mA
S2	■	● ●

* = factory setting

Wiring

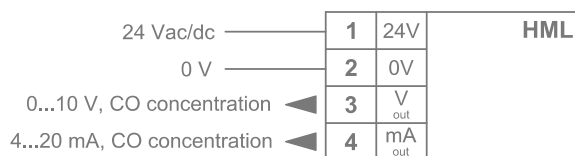

Technical data:

Supply	24 Vac/dc (22...28 V), 2 VA
Range	0...100 ppm or 0...300 ppm*
Accuracy (at 25 °C)	±10 ppm for < 70 ppm values ±15 % of value for > 70 ppm values
Output	0...10 Vdc < 1 mA* or 4...20 mA < 500 Ω
Time constant (t63%)	1.5 min
Warm up time	6 min
Operating temp.	-30...40 °C
Housing	IP54, cable gland downwards
Mounting	by screws
Dimensions (w x h x d)	100 x 113 x 46 mm
Sensor life time	< 7 years (40 % rH, 20°C)

* factory settings

Ordering guide:

Model	Product number	Description
HML	1135520	CO transmitter
HML-N	1135521	CO transmitter with display
HMV	1135510	exchange kit
HML-C	1135522	calibration tool for HML

All specifications are subject to change without notice



TECHMARK

— Industriesteuerungen GmbH — <http://www.techmark.de> — e-mail: info@techmark.de —

Kirschstrasse 20 • D-80999 München • Telefon (+49-89) 89.26.57-0 • Telefax (+49-89) 89.26.57-33